


OZZY combi sneplov



OZZY

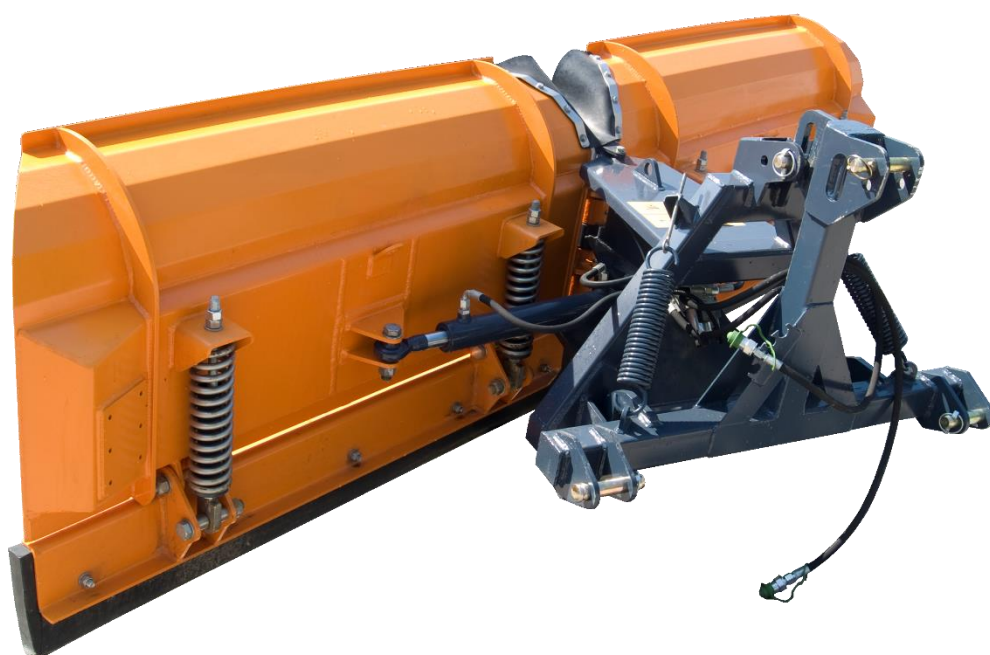


V-blade

Standard equipment:
Rubber cutting edges
Bottom-trip
3-point mount

Attention: 2 DA hydraulic outlets required.

Model	Width [mm]	Clearance width L [mm]	Height H [mm]	Weight [kg]
Ozzy 25	2500	2100	800	330
Ozzy 30	3000	2500	800	350

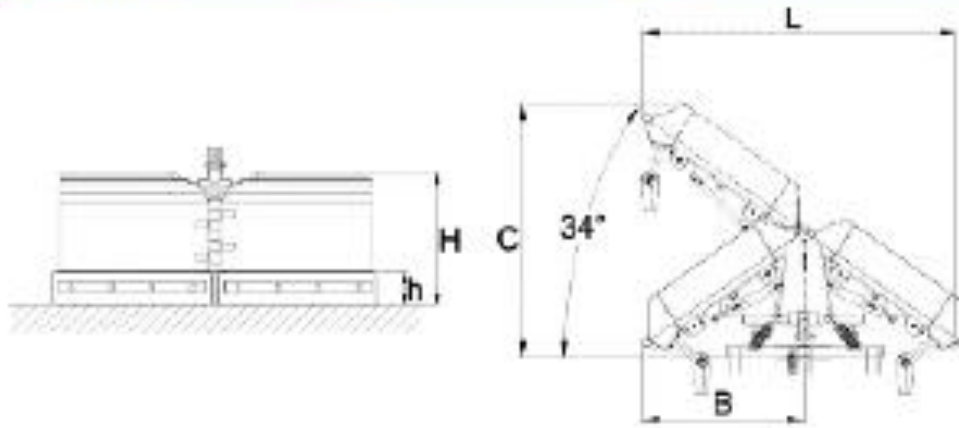

Standard



Bottom trip with
spring system



Spring floating
system



Rubber segment
cutting edge



Side lamps 12V



3P hitch mount



Hoses with quick
couplings